

OGEC-110P

Rugged Industrial Media Converter with PoE Injector, 10/100/1000Base-TX to 1000Base-X



- Auto-negotiation supported
- Auto-MDI/MDIX on copper port
- IP30 metal shell
- Hot swappable
- Layer 2 line switching fabric
- PoE Support up to 15.4/30W
- -40 °C ~ 75°C operating temperature

Description


The OGEC-110P is a 10/100/1000Base-T to 1000Base-SX/LX non-managed PoE + media converter that enables you to extend your network to longer distances. With full gigabit port and compact design, OGEC-110P not only increases the speed of your network server, but also deliver both up to 30W of power output and high data transmission speed to Power Devices. Generally, OGEC-110P is a high-performance solution for your network.

Specifications

Standard		IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3ab 1000Base-T Gigabit Ethernet IEEE 802.3z 1000Base-X Gigabit Ethernet IEEE802.3x traffic and back pressure IEEE802.3 af/at Power over Ethernet/Power over Ethernet Plus	
LAN		10/100/1000Base-T(X)	
Jumbo Frame Size		9Kbytes	
Transmission Distance	Ethernet	100m	
	Fiber	SFP	Depends on the SFP selection
Transmission Speed	Ethernet	10/100/1000Mbps	
	Fiber	1000Mbps	
Auto MDI/MDIX		Yes (automatic detection of straight or crossover twisted pair cables)	
Connectors		1 x RJ-45 socket 1 x SFP slot	
PoE Power Output		15.4/30W	
PoE Power Supply Mode		End-span / Mid-Span	
PoE Pin Assignment		End-span: 1/2(+), 3/6(-) / Mid-Span: 4/5(+), 7/8(-)	
LED Indicators		Power: PWR1/PWR 2 (Green) Fiber Link: FX_LINK (Green) PoE Status: PoE (Green/Blinking) Fiber LFP Alarm: FX_LFP(Red) Ethernet LFP Alarm: TX_LFP(Red) RJ-45 Port: Speed 10M(Off), 100M(Orange), 1000M (Green)	
DIP Switch		PoE Output: Enable/Disable Link Fault Pass Through (LFP): Enable/Disable Power Supply Mode: End-Span/Mid-Span Jumbo Frame: Enable/Disable	
Power Input		Unit accepts 44 to 57 VDC	
Power Consumption		3.5W	
Dimensions (W x D x H)		101 x 101 x 32 mm	

Weight	357g
Enclosure	Metal shell
Installation	Din-rail / wall-mounted
Power Reverse	Support
Overload Current	Support
Operating temperature	-40 °C ~ 75°C
Storage temperature	-40 °C ~ 85°C
Operating humidity	5 ~ 95% (non-condensing)
Storage humidity	0 ~ 95% (non-condensing)
MTBF	>50000 Hours
Safety	EN60950-1, IEC60950-1
Certification Compliance	CE, FCC
EMC	EN61000-4-5
RoHS	Yes

Dimension Diagram (Unit: mm)

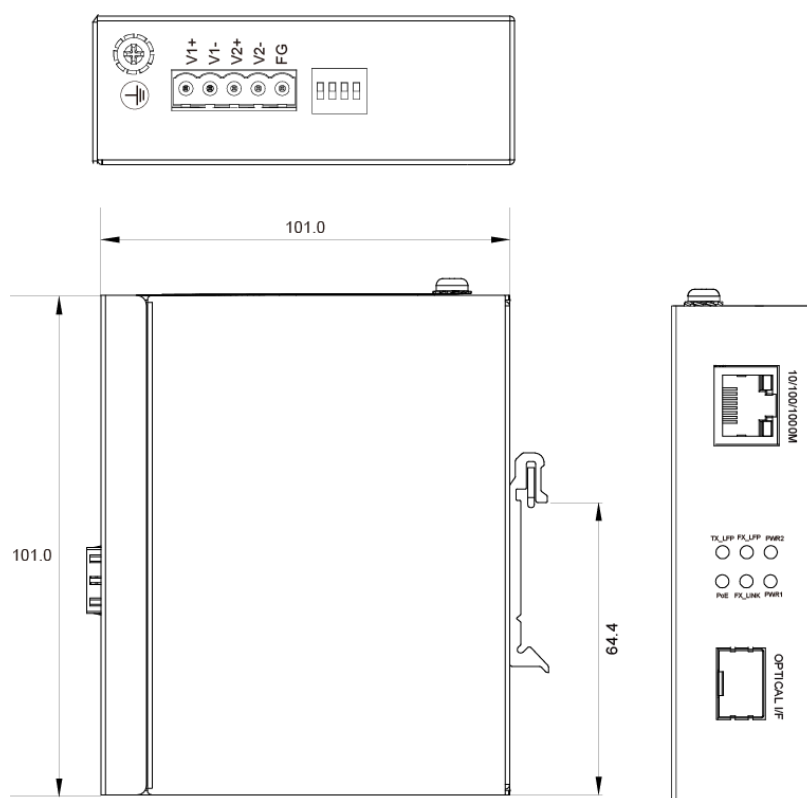

Ordering Information

Model Name	Description
OGE-110P-SFP	Industrial Media Converter w/PoE Injector, 10/100/1000Base-TX to 1000Base-SX/LX, 1G SFP Slot, SFP excluded.

Package Content

- OGEC-110P-SFP Media Converter w/PoE Injector
- Din Rail Kit
- Quick Instruction Manual

Accessories (sold separately)

■ Fiber Patch Cord

Model Name	Description
SC-M/SC-M OPTICAL FIBER 3M SM 0dB	3M Single Mode Simplex SC/SC Connector
SC-M/SC-M OPTICAL FIBER 3M MM 0dB	3M Multi-mode Simplex SC/SC Connector
LC-M/LC-M OPTICAL FIBER 3M SM 0dB Duplex	3M Single Mode Duplex LC/LC Connector
LC-M/LC-M OPTICAL FIBER 3M MM 0dB Duplex	3M Multi-mode Duplex LC/LC Connector
LC-M/SC-M OPTICAL FIBER 3M SM 0dB Duplex	3M Single Mode Duplex LC/SC Connector
LC-M/SC-M OPTICAL FIBER 3M MM 0dB Duplex	3M Multi-mode Duplex LC/SC Connector

*Note: There are many types/lengths of fiber patch cords, if there are any specifications not listed, please contact us.

■ Wall Mount Kit

Model Name	Description
WMK-001	Wall Mount Kit for compact OGEC-D series model

■ Industrial SFP Transceiver

Model Name	Description
SFP 1.25G MM-LC-2F-85	SFP 1.25Gbps, 850nm, 500m, 0~70°C, Multi-mode, Duplex LC connector
SFP 1.25G MM-LC-2F-13	SFP 1.25Gbps, 1310nm, 2km, 0~70°C, Multi-mode, Duplex LC connector
SFP 1.25G SM-LC-2F-13-20	SFP 1.25Gbps, 1310nm, 20km, 0~70°C, Single Mode, Duplex LC connector
SFP 1.25G SM-LC-2F-15-40	SFP 1.25Gbps, 1550nm, 40km, 0~70°C, Single Mode, Duplex LC connector
SFP 1.25G SM-LC-2F-15-120	SFP 1.25Gbps, 1550nm, 120m, 0~70°C, Single Mode, Duplex LC connector
SFP 1.25G SM-SC-BIDI-B3	SFP 1.25Gbps, 1310nm/1550nm, 20km, 0~70°C, Single Mode, Bi-di Simplex SC connector
SFP 1.25G SM-SC-BIDI-B5	SFP 1.25Gbps, 1550nm/1310nm, 20km, 0~70°C, Single Mode, Bi-di Simplex SC connector
SFP 1.25G RJ-45	SFP 10/100/1000Base-T UTP, 100m, 0~70°C

For other related product information, please visit the official website: www.hoatech.com.tw

© Hoatech Technologies Co., Ltd. All rights reserved

Last updated : 2023/2/1 V2.1